

6 point star

 SCREWS



ACCESSORIES

6 point star

SCREWS


OBE is able to produce its whole screw product programme of plus-minus screws now also according to EN ISO 10664 - Hexalobular internal driving feature system in T3.

These screws are characterised by a special screw head shaped inside like a star. The suitable screw driver and also different bits can be provided by OBE.

Benefits of 6 point star screws

- No slipping out of the screw with the driver when the torque level is reached
- The new drive allows a higher torque compared to Minus or Plus-minus screws which leads to a higher security for the assembly as the “star” geometry does not get destroyed so easily
- The guidance between screw-driver and screw leads to a perfect assembling of the screws especially in spring hinges which are equipped with a double action. The screw can be mounted without any additional help into spring hinges!

Current products in T3

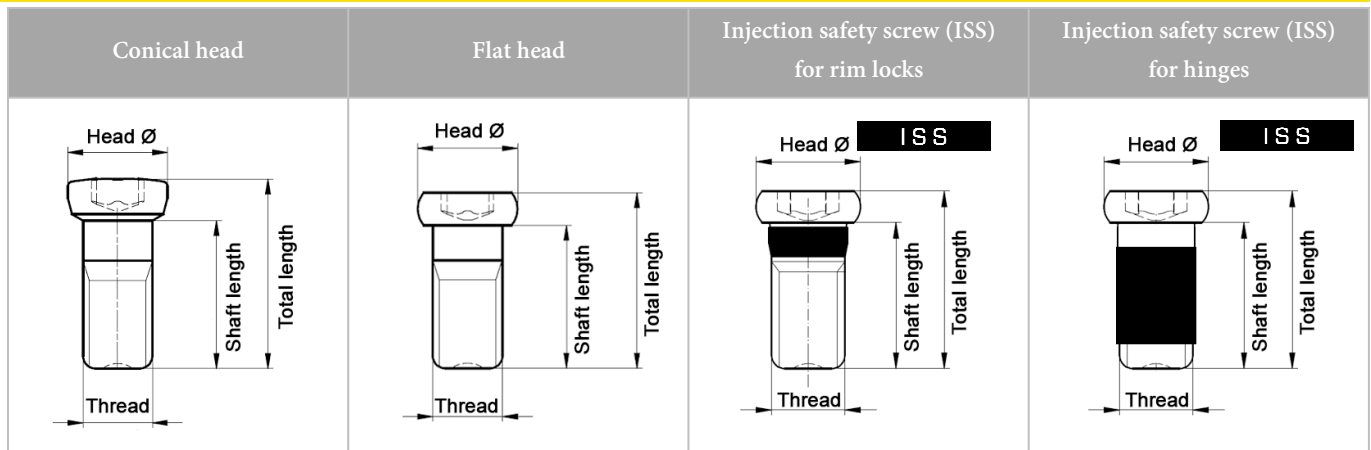

| Art. No. | Size | Thread | Total length | Shaft length | Head Ø | Screw type |
|----------|------|--------|--------------|--------------|--------|--------------------------------------|
| 99-04750 | T3 | M1.2 | 2.3 | 1.8 | 2.2 | Flat head screw |
| 99-04002 | T3 | M1.2 | 9.0 | 8.5 | 1.9 | Flat head screw for rimless frames |
| 99-04001 | T3 | M1.2 | 13.0 | 12.4 | 2.0 | Flat head screw for rimless frames |
| 99-04803 | T3 | M1.4 | 2.4 | 1.6 | 2.0 | Conical head screw |
| 99-04728 | T3 | M1.4 | 2.8 | 2.1 | 2.0 | Flat head screw |
| 99-04811 | T3 | M1.4 | 3.0 | 2.2 | 2.0 | Conical head screw |
| 99-04812 | T3 | M1.4 | 3.3 | 2.5 | 2.0 | Conical head screw |
| 99-04324 | T3 | M1.4 | 3.4 | 2.7 | 2.0 | Injection safety screw for hinges |
| 99-04609 | T3 | M1.4 | 3.5 | 2.8 | 2.0 | Injection safety screw for rim locks |
| 99-04724 | T3 | M1.4 | 3.5 | 2.8 | 2.0 | Flat head screw |
| 99-04814 | T3 | M1.4 | 3.8 | 3.0 | 2.0 | Conical head screw |
| 99-04701 | T3 | M1.4 | 3.9 | 3.2 | 2.0 | Flat head screw |
| 99-04602 | T3 | M1.4 | 4.3 | 3.6 | 2.0 | Injection safety screw for rim locks |
| 99-04327 | T3 | M1.4 | 4.5 | 3.8 | 2.0 | Injection safety screw for hinges |
| 99-04816 | T3 | M1.4 | 4.5 | 3.7 | 2.0 | Conical head screw |
| 99-04333 | T3 | M1.4 | 5.0 | 4.3 | 2.0 | Injection safety screw for hinges |
| 99-04730 | T3 | M1.4 | 6.0 | 5.3 | 2.0 | Flat head screw |
| 99-04726 | T3 | M1.6 | 5.0 | 4.3 | 2.5 | Flat head screw |
| 99-04725 | T3 | M1.6 | 5.3 | 4.5 | 2.5 | Flat head screw |



OBE GmbH & Co. KG · Turnstr. 22 · 75228 Ispringen · Germany
Tel. +49 7231 802-0 · www.obe.de · info@obe.de